

Phoenix Connectors

DIN41612 RIGHT ANGLE MALE C BODY

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:


Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: -55°C ~+105°C.

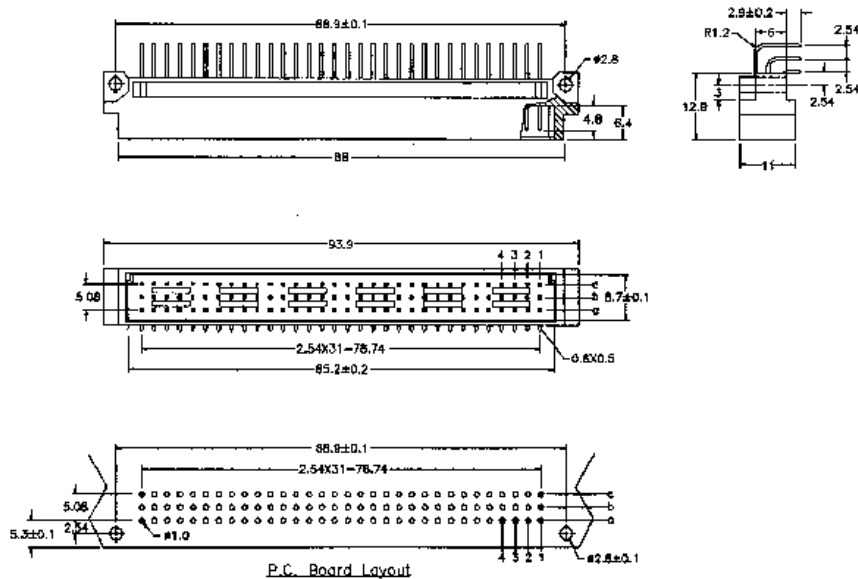

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a b -	
	64	a - c	

ORDER INFORMATION

DIN -11 XX S
1 2 3

1. C body male right angle
2. No. of Ways (64,96)
3. Selective Gold Plating

Phoenix Electronics Castlehill Industrial Estate Carlisle ML8 5UF
Telephone 01555 751566 Fax 01555 751562