

Phoenix Connectors





DIN41612 C BODY FEMALE STRAIGHT PCB

Material:

Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+105°C.

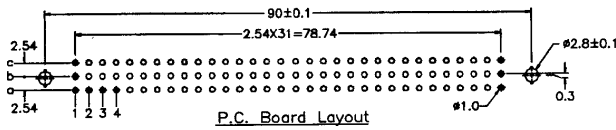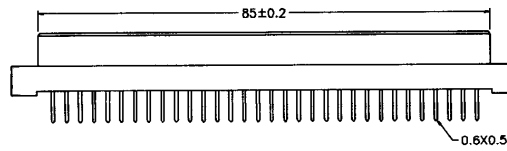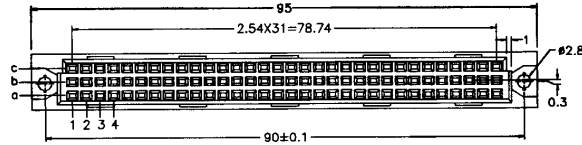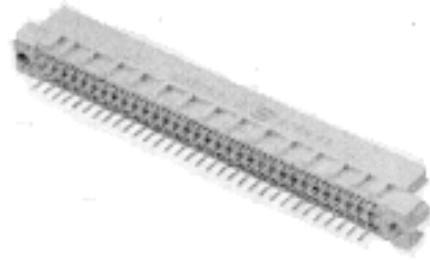

Pitch	Position	Rows with Contacts	X length		Contact Arrange
			1	2	
2.54mm	96	a b c	4.0	2.5	13 17
	64	a b -			
	64	a - c			

ORDER INFORMATION

- | | |
|--------------|------------------------------|
| DIN -12 XX S | 1.C body female straight PCB |
| 1 2 3 | 2. No.of Ways (64,96) |
| | 3. Selective Gold Plating |

Phoenix Electronics Castlehill Industrial Estate Carluke ML8 5UF
 Telephone 01555 751566 Fax 01555 751562