

Phoenix Connectors







EJECTOR HEADER 2.54mm

MATERIAL

Insulator: P.B.T. +30% Glass Fibre, UL 94V-0
Contact Pin : Brass

SPECIFICATION

Current Rate :1 AMP.
Insulation Resistance: 1000MOhm Min. At 500V DC
Contact Resistance : 10m Ohm Max.
Dielectric Voltage 500V AC for one minute
Operation Temperature : -55 C to +105C

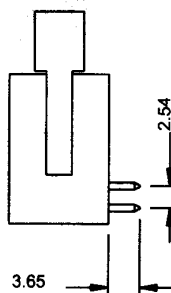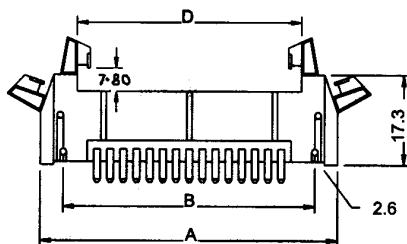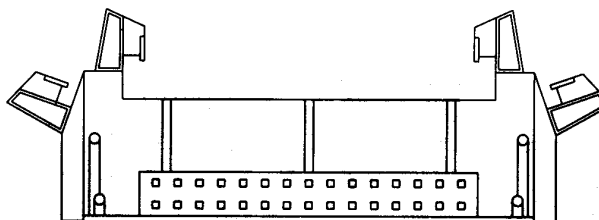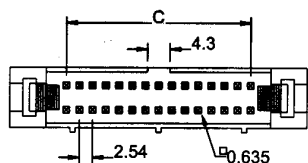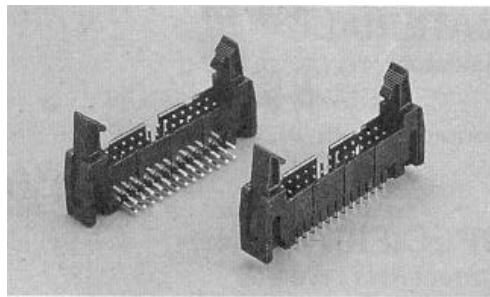

| No. of Pins | 10 | 14 | 16 | 20 | 26 | 34 | 40 | 50 | 64 |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| A (mm) | 32.0 | 37.08 | 39.62 | 44.70 | 52.32 | 62.48 | 70.10 | 82.20 | 100.58 |
| B (mm) | 21.84 | 26.92 | 29.46 | 34.54 | 42.16 | 52.32 | 59.94 | 72.64 | 90.42 |
| C (mm) | 10.16 | 15.24 | 17.78 | 22.86 | 30.48 | 40.64 | 48.26 | 60.96 | 78.74 |
| D (mm) | 17.96 | 23.04 | 25.58 | 30.33 | 38.28 | 48.44 | 56.06 | 68.76 | 86.54 |

ORDER INFORMATION

PEC EH -XXXGB1
1 2 3 4 5

- 1.S: Straight
R: Right Angle
- 2. Number of Contacts
(10,14,16,20,26,34,40,50,64)
- 3. G :Gold Flash
- 4. B: Black
- 5. 1: Long Latches

Phoenix Electronics Castlehill Industrial Estate Carluke ML8 5UF
Telephone 01555 751566 Fax 01555 751562