




# Phoenix Electronics Distribution Ltd.


Castlehill Industrial Estate  
 Carlisle ML8 5UF  
 Tel 01555 751566 Fax 01555 751562

## CIRCULAR INSULATED SPACERS


- Nylon 66 moulding, Brass insert, mild Steel stud (Zinc plated)
- Custom lengths available. Please contact Technical Sales for a quotation.

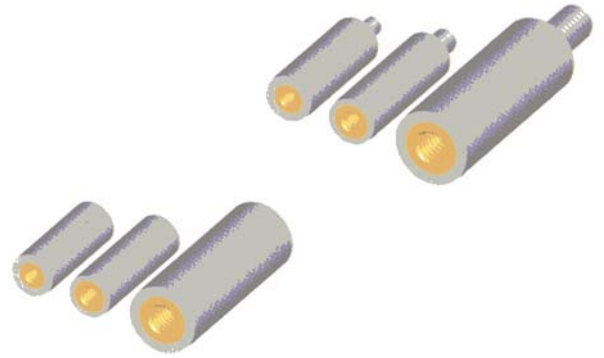

### Male / Female

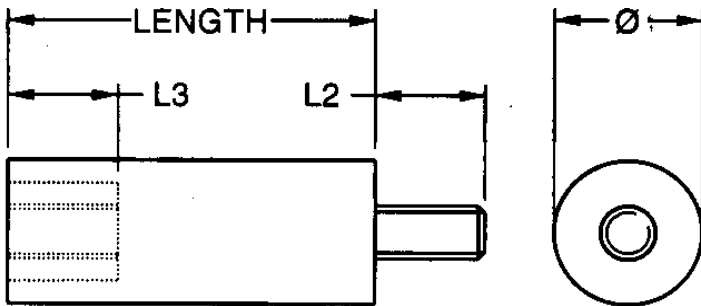

### Female / Female

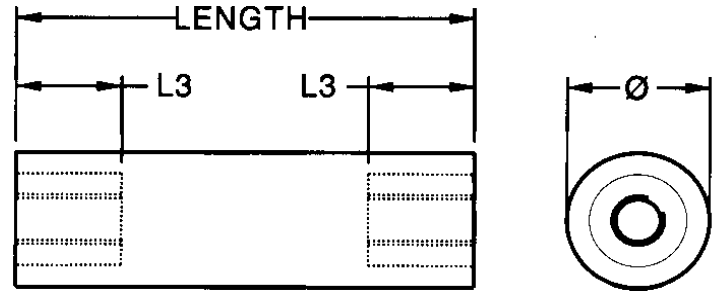

#### Material Nylon moulding, Brass insert, Steel Stud

Style	Male/Female			
Thread	M3	M4	M5	M6
Body Ø	7.0mm	9.5mm	12.5mm	16.0mm
L2	6.5mm	9.5mm	12.5mm	12.5mm
L3	4.5mm	6.5mm	8.0mm	12.5mm


#### Material Nylon moulding, Brass insert

Style	Female/Female			
Thread	M3	M4	M5	M6
Body Ø	7.0mm	9.5mm	12.5mm	16.0mm
L2	4.5mm	6.5mm	8.0mm	12.5mm

#### Length (mm)

13	R30-7311300				R30-5311300			
16		R40-7311600				R40-5311600		
19						R40-5311900		
22			R50-7312200			R40-5312500	R50-5312200	
25	R30-7312500	R40-7312500	R50-7312500		R30-5312500			
32				R60-7313200	R30-5313200			R60-5313200
38		R40-7313800	R50-7313800	R60-7313800	R30-5313800			
45			R50-7314500					
51			R50-7315100	R60-7315100		R40-5315100		R60-5315100
64							R50-5316400	

### Male / Male

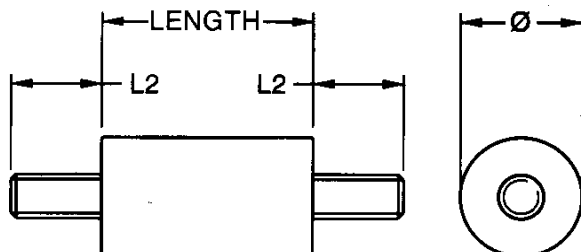

#### Material Nylon moulding, Steel Stud

Thread	M3	M4	M5	M6
Body Ø	7.0mm	9.5mm	12.5mm	16.0mm
L2	6.5mm	9.5mm	12.5mm	12.5mm

Length (mm)				
13	R30-8311300			
22		R40-8312200	R50-8312200	
25	R30-8312500			
32				R60-8313200
38			R50-8313800	R60-8313800