

Phoenix Connectors



STRIP PIN HEADER 2.54mm STRAIGHT TYPE

MATERIAL

Insulator: P.B.T. +30% Glass Fibre, UL 94V-0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP.
Insulation Resistance: 5000MOhm Min. At DC 500V
Contact Resistance : 20m Ohm Max. AT DC 100ma
Operation Temperature : -55 C to +105C

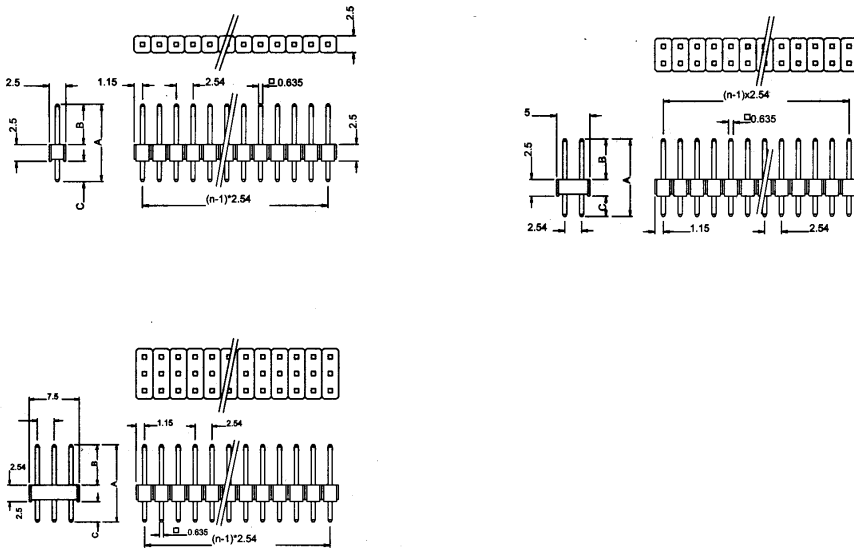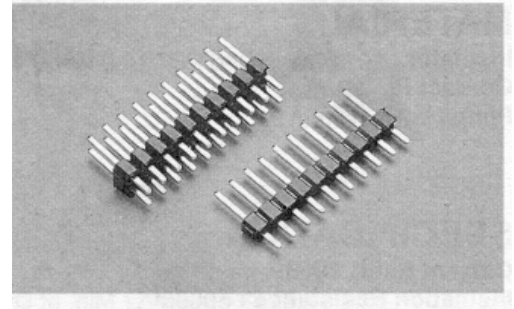

DIMENSION A	DIMENSION B	DIMENSION C
11.60	6.1	3.0

ORDER INFORMATION

PEC XH-XXG
1 2 3

- 1.S: Single Row
D: Dual Row
2. Number of Contacts per Row
(Single 1-36, Dual 2-15)
3. Gold Flash

Phoenix Electronics Castlehill Industrial Estate Carlisle ML8 5UF
Telephone 01555 751566 Fax 01555 751562